


### Motor

Motor execution	Submersible motor-10"-50°C	Speed	1/min 3500
Motor type	10MX-11000-XP	Power factor	0.86
Frame size	10 Inch	Efficiency	87 %
Rated voltage	575V	Motor cable	7 m 3 rd 1x35 + 1 rd 1x25 (PE)
Starting mode	DOL or inverter	Cooling flow	1.00 m/s
Frequency	60 Hz	Degree of protection	IP 68
Rated power	kW 110 SF 1.15	Installation length L	mm 1773
Rated current	A 150	Weight	kg 378

### Materials

Motor casing	Stainless steel / 1.4571
Shaft	Stainless steel / 1.4462
Radial bearing	carbon
Axial bearing	carbon
Winding wire	PE2/PA
Mechanical seal	SiC/ SiC
Connection flange	Stainless steel / 1.4408
Fasteners	Stainless steel / 1.4401

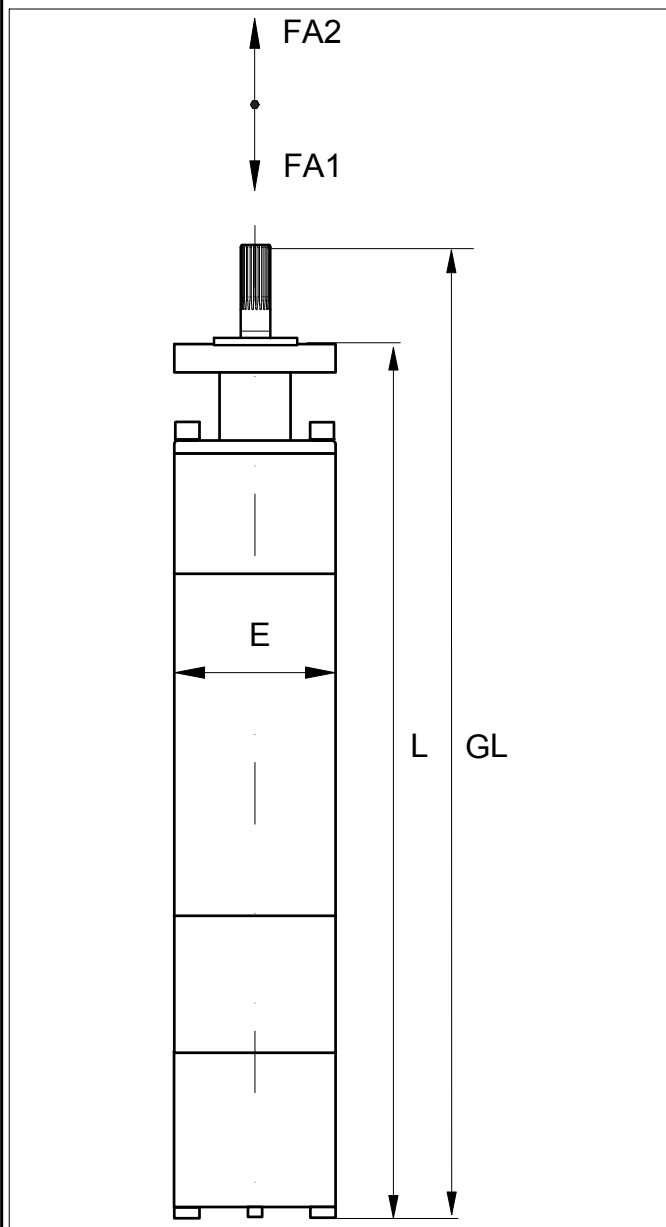

Name	Value
E	240
FA1	60 kN
FA2	1,4 kN
GL	1900
L	1773

