

# 61017MP



### AVAILABLE MOUNTING CONFIGURATIONS

61017MP-F FRAME MOUNT  
 61017MP-EM ENGINE MOUNT  
 61017MP-RP-F REDI-PRIME FRAME MOUNT  
 61017MP-RP-EM REDI-PRIME ENGINE MOUNT

### OPERATING LEVELS

<b>MIN FLOW</b>	500 GPM	114 m <sup>3</sup> /h
<b>MAX FLOW</b>	4250 GPM	965 m <sup>3</sup> /h
<b>DISCHARGE SIZE</b>	6"	150 mm
<b>SUCTION SIZE</b>	10"	250 mm
<b>SOLIDS HANDLING</b>	3.38"	86 mm
<b>MAX SPEED</b>	1800 RPM	2100 RPM
<b>SHUT-OFF HEAD</b>	365'	111 m
<b>BEP HEAD</b>	230'	70 m
<b>BEP FLOW</b>	3450 GPM	784 m <sup>3</sup> /h
<b>BEP PERCENT</b>	79%	79%



A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

PARTS	HYBRID	HIGH CHROME
<b>IMPELLER</b>	CHROME IRON	CHROME IRON
<b>VOLUTE</b>	DUCTILE IRON	CHROME IRON
<b>SHAFT</b>	17-4 P.H. STAINLESS STEEL	17-4 P.H. STAINLESS STEEL
<b>SHAFT SLEEVE</b>	416 STAINLESS STEEL CHR. PLATED	416 STAINLESS STEEL CHR. PLATED
<b>SUCTION COVER</b>	DUCTILE IRON	DUCTILE IRON
<b>BACKPLATE</b>	DUCTILE IRON	CHROME IRON
<b>WEAR PLATE</b>	CHROME IRON	CHROME IRON
<b>MECHANICAL SEAL</b>	TUNGSTEN CARBIDE VS. SILICON CARBIDE	TUNGSTEN CARBIDE VS. SILICON CARBIDE
<b>BEARING FRAME</b>	CAST IRON	CAST IRON
<b>O-RINGS</b>	VITON	VITON

The 61017MP pump is designed with Cornell's renowned quality and durability. It features a 6" discharge, 10" suction, and enclosed impeller. Available in Hybrid or High Chrome materials. Cornell's patented Cycloseal® design is standard, with a Type 2 single mechanical seal with Viton elastomers, stainless steel hardware and tungsten carbide vs. silicon carbide seal faces for abrasion resistance. Heavy-duty F18 bearing frame with double angular contact thrust bearing on frame-mount models.

- Flow rates up to 4,250 GPM / Heads up to 365'
- Redi-Prime® available for fully-automatic continuous priming
- RunDry™ option (Indefinite run dry capability)
- Hardness rating > 600BHN provides better wear
- Heavy-duty construction
- Front adjustable wear plate
- Replaceable wear plates



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS



REFRIGERATION




RENTAL



# 61017MP

Performances shown are for S.G. 1.0 60°F water, frame mounted with Cycloseal Other mounting styles or S.G. may require curve adjustments.	Speed	Impeller Dia.	Style	Volute	Solids Dia.	N <sub>s</sub>	Suction	Discharge	No. Vanes
	VARIOUS	17.50"	ENCLOSED	SINGLE	3.38"	1880	10"	6"	2

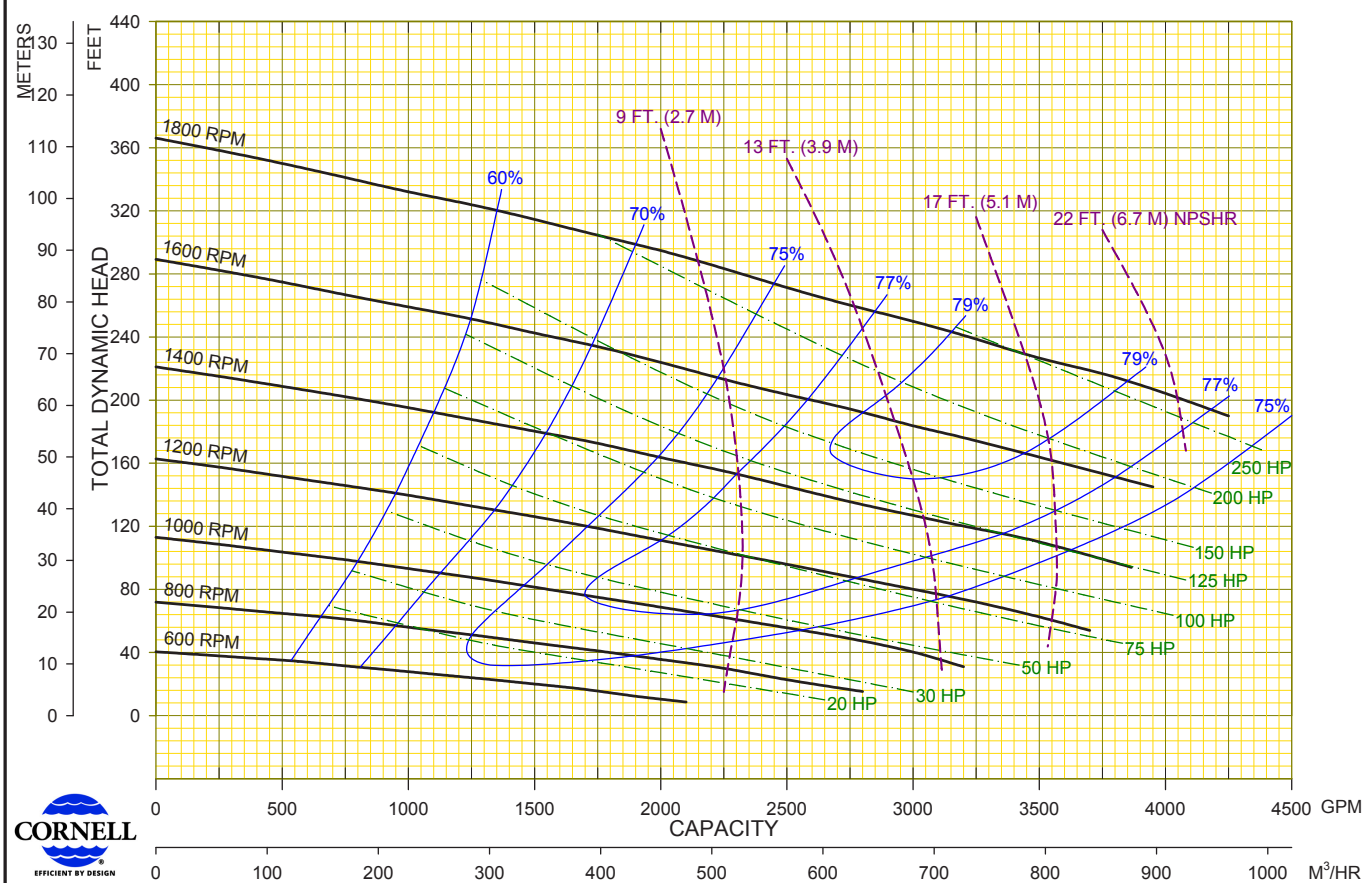

Cornell Pump Company • Clackamas, Oregon	01	02/12/15	CTG	MODEL : 61017MP	CURVE NO: <b>61017MPVA</b>
	00	10/15/13		TYPE :SOLID HANDLING	