

AVAILABLE MOUNTING CONFIGURATIONS

2SPM FRAME MOUNT WITH CHROME IRON LINER
2SPR FRAME MOUNT WITH RUBBER LINER



A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

OPERATING LEVELS	CHROME IRON		RUBBER	
MIN FLOW	60 GPM	13.6 m ³ /h	65 GPM	15m ³ /h
MAX FLOW	730 GPM	166 m ³ /h	440 GPM	100m ³ /h
DISCHARGE SIZE	2"	50 mm	2"	50 mm
SUCTION SIZE	3"	75 mm	3"	75 mm
SOLIDS HANDLING	1"	25 mm	.8"	20 mm
MAX SPEED	3200 RPM	3200 RPM	2300 RPM	2300 RPM
SHUT-OFF HEAD	295'	90 m	152'	46 m
BEP HEAD	237'	72 m	132'	40 m
BEP FLOW	560 GPM	127 m ³ /h	325 GPM	74 m ³ /h
BEP	58%	58%	55%	55%


PARTS	STANDARD MATERIAL (CHROME IRON)	RUBBER LINED
IMPELLER	Chrome Iron	Natural Rubber
VOLUTE LINERS	Chrome Iron	Natural Rubber
VOLUTE CASING	Ductile Iron	Ductile Iron
SHAFT	4140 Steel	4140 Steel
SHAFT SLEEVE	420 Stainless Steel	420 Stainless Steel
MECHANICAL SEAL	Tungsten Carbide/Silicon Carbide (stationary)	Tungsten Carbide/Silicon Carbide (stationary)
BEARING HOUSING	Ductile Iron	Ductile Iron
BEARING FRAME	Cast Iron	Cast Iron
O-RINGS	Nitrile	Nitrile
FLANGE GASKETS	Natural Rubber	Natural Rubber
EXPELLER	Chrome Iron	Chrome Iron
BACKPLATE	Chrome Iron	Chrome Iron

The 2SP Slurry Pump is designed with Cornell's renowned quality and durability. It features a 2" discharge and a 3" suction. Available in chrome iron and rubber-lined models. Cornell's patented Cycloseal® design is standard and includes a Type 2 single mechanical seal with elastomer bellows, stainless steel hardware, tungsten carbide rotating and silicon carbide stationary seal faces for abrasion resistance. Chrome Iron or Rubber Lining options are available to optimize wear life for various material characteristics.

- Enclosed impeller for higher efficiency
- Large solids handling capability
- Robust design allows it to be applied in difficult operating environments
- Industry leading two year warranty
- Superior abrasive and corrosive wear life
- Handles pH levels of 1 to 13 (rubber lining); 3 to 14 (metal)



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS





REFRIGERATION



RENTAL



DATA SHEET 2SP

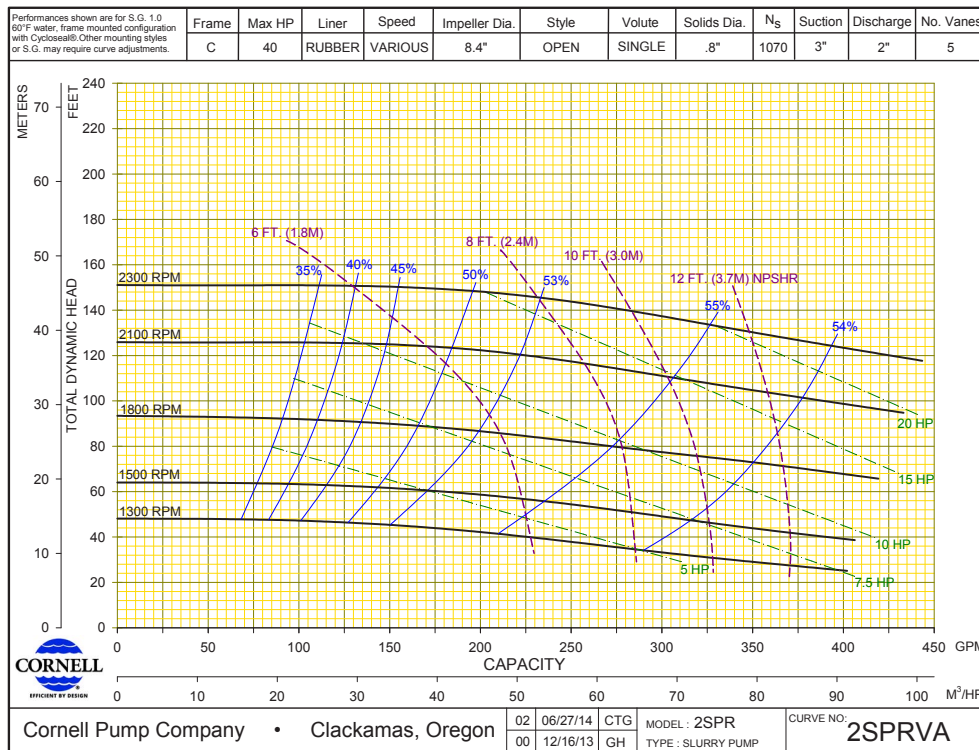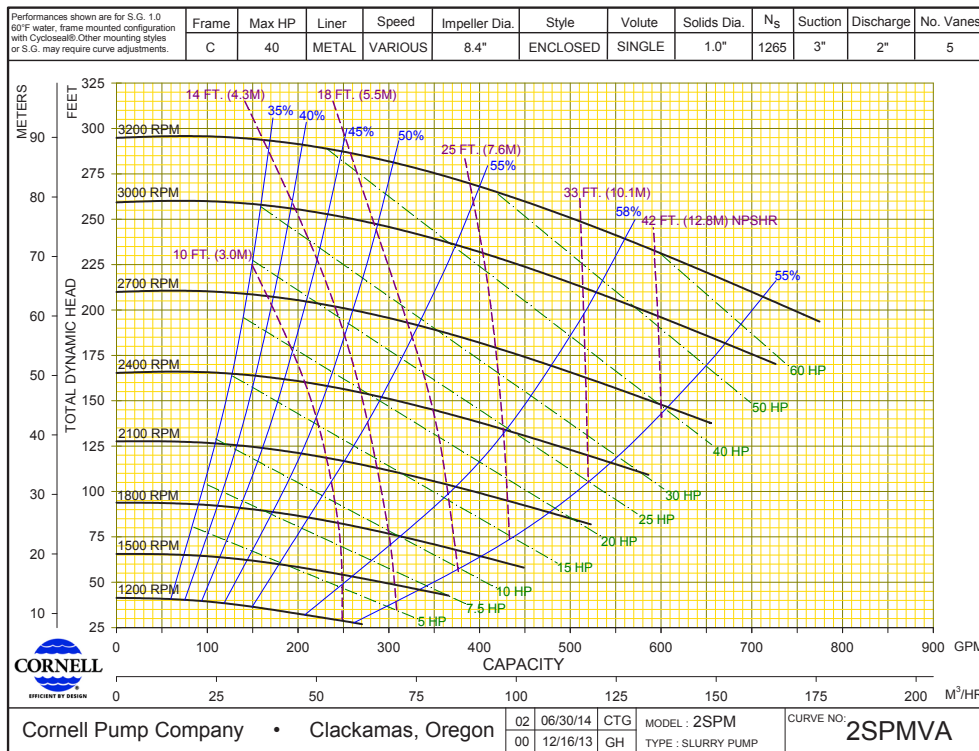

DS2SP-150217